


# HF I/Q SDR Receiver DR2A+

## 30 KHz-40 MHz YU1LM/QRP

EXTERNAL LO(local oscillator) CONNECTION

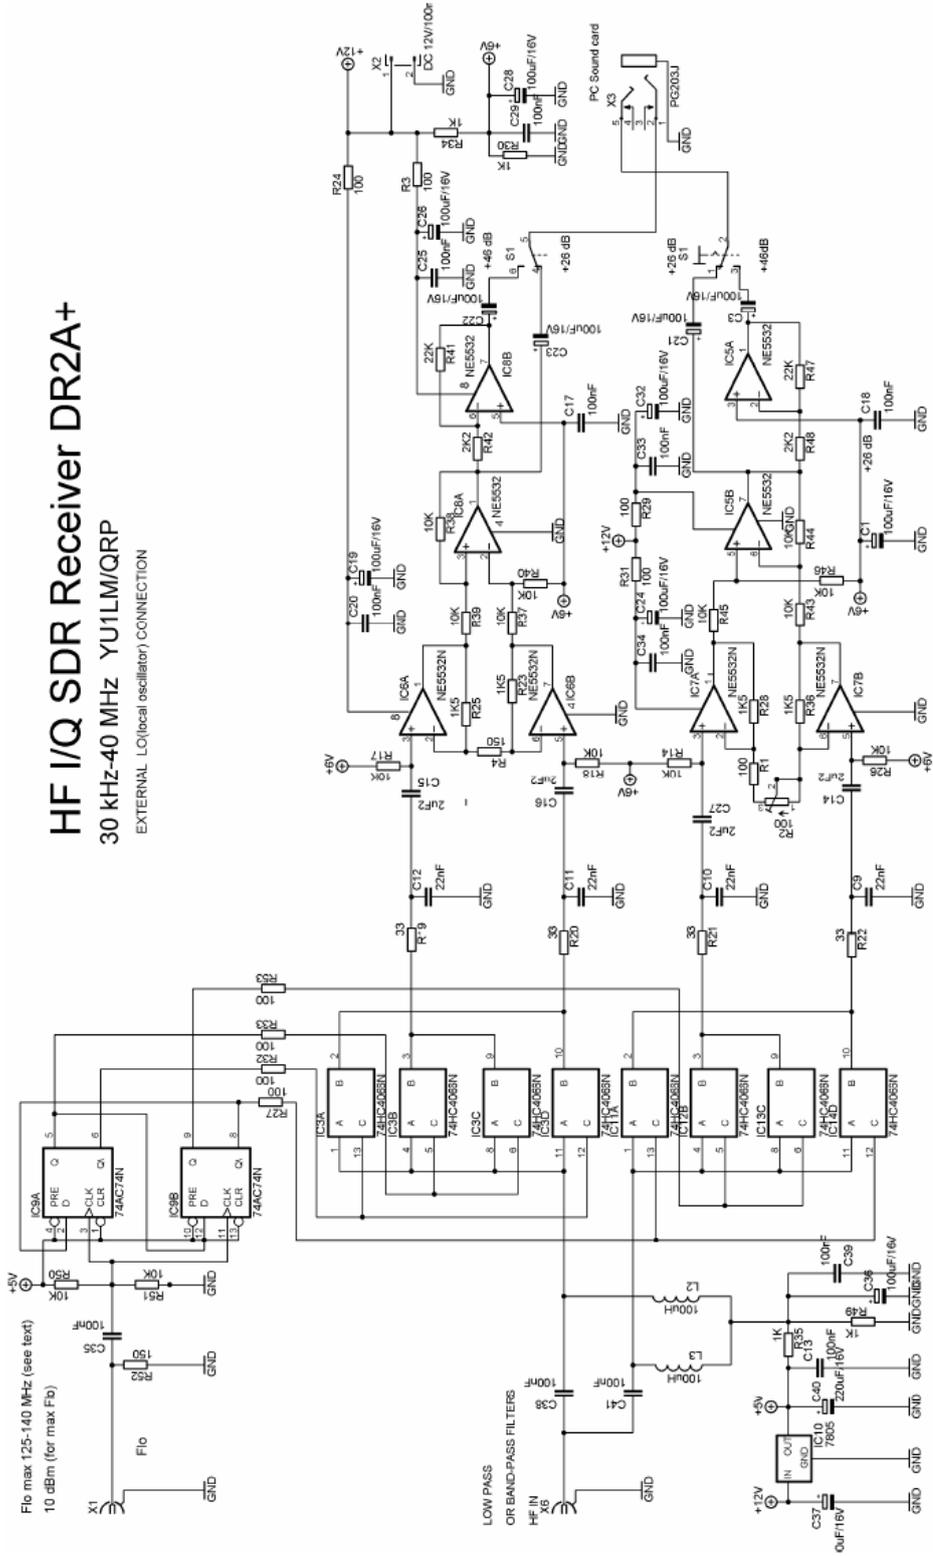

Flo max 125-140 MHz (see text)  
10 dBm (for max Flo)

LOW PASS  
OR BAND-PASS FILTERS  
HF IN  
X8

+5V  
+12V  
C37  
C10  
C40  
7805  
220uF/16V  
100uF  
100uF/16V  
C39  
100uF/16V  
GND  
GND  
GND  
GND  
GND  
GND